
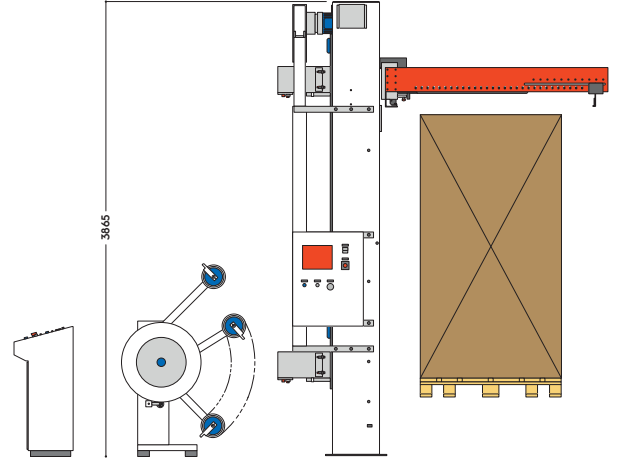


ÇEMBERLEME MAKİNESİ / Strapping Machine

Yatay Palet Çemberleme Makinesi

Horizontal Pallet
Vertical Strapping
Machine

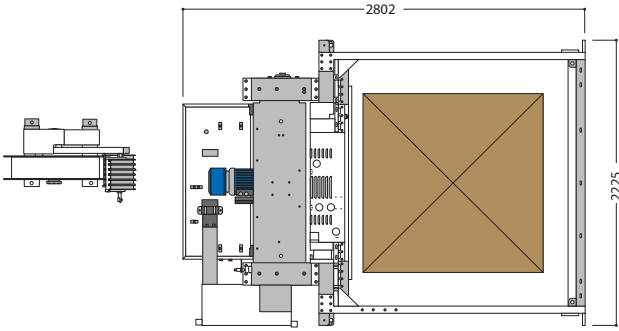

GENEL ÖZELLİKLER

- Kullanılan çember tipi :
Polypropylene (PP) Polyester (PET)
- Çember genişliği : 8- 19 mm
- Çember kalınlığı: 0,60 - 1,27 mm
- Gerdirme kuvveti : 700 Kga kadar
- Kaynak şekli : Isı / titreşim
- Atma hızı : 2,4 - 5,5 m/ sn
- Geri çekme hızı : 2,4 - 5,5 m/ sn
- Gerdirme hızı : 0,25 m/ sn
- Besleme gerilimi : 220/400 V AC üç faz
- Elektrik sarfiyatı : 3 Kw
- Çerçeve standart ölçüsü : 1510 x 1510 mm
- Çember bobini iç ölçüleri : 390/405 mm; genişlik 150/190 mm

GENERAL FEATURES

- Type of strap: Polypropylene (PP) Polyester (PET)
- Straps Width: 8- 19 mm
- Strap thickness: 0,60 - 1,27 mm
- Strap tensioning: Up to 700 Kg
- Strap junction: through welding / vibration
- Throwing speed: 2,4 - 5,5 m/sec
- Recovery speed: 2,4 - 5,5 m/sec
- Tension speed: 0,25 m/sec
- Supply electric voltage: 220/400 V AC three-phase
- Installed electric power: 3 Kw
- Arch standard dimensions: 1510 x 1510mm
- Core inside diameter : 390/405 mm; width 150/190 mm